



USER MANUAL

Chargers for Lithium Ion Batteries

05.12.2020

ACCU-24 Batterien & Systeme GmbH, Untergasse 5, D-63688 Gedern
E-Mail: info@accu-24.de, Tel.: +49 (0)6045 9525-20

www.accu-24.de

www.airbatt.de



IMPORTANT SAFETY INSTRUCTIONS!




TO REDUCE THE RISK OF FIRE AND ELECTRIC SHOCK:

READ THROUGH THESE INSTRUCTIONS PRIOR TO USING THE PRODUCT.

CAREFULLY FOLLOW THESE INSTRUCTIONS WHEN USING THE PRODUCT.

RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.



CAUTION! DOUBLE POLE / NEUTRAL FUSING!



This product is designed for indoor use.
(Not applicable to products marked "IP67")

IP41 IP4X IP44 ♦♦IP67

A version of this product marked "IP41" may be available. This version is protected against ingress of solid objects larger than 1.0 mm and the effects of vertically falling drops of water according to standard EN/IEC 60529.

A version of this product marked "IP4X" or "IP40" may be available. This version is protected against ingress of solid objects larger than 1.0 mm.

A version of this product marked "IP44" may be available. This version is protected against ingress of solid objects larger than 1.0 mm and the effects of water splashed against the enclosure from any direction according to standard EN/IEC 60529.

A version of this product, marked with a symbol with two drops of water and/or "IP67", may be available. This version is filled with a potting

compound and is dust-tight and protected against the effects of temporary immersion in water according to standard EN/IEC 60529, but must not be immersed in water for longer periods of time.



Products marked with the "double square symbol" are double insulated (Insulation Class II). Products without this mark are Class I (relies on safety mains with protective earth).

WARNING: To avoid risk of electric shock, Class I products must only be connected to a supply mains with protective earth.



At the end of their service life electric and electronic equipment and their accessories shall not be discarded with the municipal waste but be disposed of using separate collection, treatment, recovery/recycling and environmentally sound disposal. This also applies to any potentially bio hazardous parts and accessories. If in doubt; contact your local authorities to determine the proper method.

Technical specifications for your product:
See tables, the marking on the product
or www.accu-24.de

Cautions to observe prior to use

- The intended use for this product is to charge a battery or a battery powered electrical accessory (NiCd/NiMH, Lead-Acid, Lithium-Ion or LiFePO₄ batteries) or to be used as a Power Supply to power an electrical accessory. Please see the marking on the product you have to verify the type of product you have and read the applicable instructions and technical specifications included with this manual.
- This product may be used by unskilled operators, under the condition that these instructions are followed.
- Unskilled operators may contact the supplier or manufacturer for assistance, if needed, in setting up, using or maintaining this product and to report unexpected operation or events.
- This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved. Do not allow small children to handle this product while unattended as cables may represent a risk for strangulation and small parts may represent a risk for inhalation or swallowing.
- Do not allow animals to come into contact with this product. Some animals are known to cause damage to cables etc which may be a potential for risk of electric shock and excessive temperatures. Also, cables and small parts may represent a strangulation risk for the animal.
- If the product is equipped with a mains cord, please check that the cord is not damaged. If the cord is damaged, the product must not be used until the cord is replaced. Replacement should be carried out by qualified personnel.
- The mains socket outlet used should always be easily accessible to facilitate immediate removal of the products mains supply should an operational error occur during use. If the product has a detachable mains cord the appliance coupler may be used as a disconnect device.
- The product is "switched on" by inserting the mains plug into the mains socket and "switched off" by disconnecting the mains plug from the mains socket.
- The product may be connected to an IT type mains supply.
- For use in U.S.A.:
 - Be sure to use 125V 15A receptacle configuration before plugging in.
 - Use a UL817-standard compliant mains cord (plug type NEMA 1-15, cord type SJT or SVT).
- For use outside U.S.A.:
Use a mains cord compliant with the country specific requirements.
- The time from powering this product until its full function starts may exceed 15 seconds.
- Should an operational error or unexpected change in the performance occur during use; disconnect the product from the mains immediately by disconnecting the mains plug from the mains socket and contact the supplier or manufacturer (see contact details on the front of this document).
- When not in use please think about disconnecting the product from the mains. This will reduce the risk of hazards, reduce the products environmental impact and save electricity costs.
- To avoid overheating make sure there is sufficient room for the circulation of air around the product when in use. Do not cover it up.
- Even though this product complies with relevant safety standards it should not be in contact with human skin for long periods as some people may get allergies or injuries from long-term contact with moderate temperatures and/or plastic materials.
- Prior to using this product with accessories and/or interconnected equipment please carefully read its respective User Manuals.
- If the product is supplied with exchangeable output plugs, please see separate page for assembly.
- Output cables having a modular plug (similar to a telephone connector) must never be connected to a telephone outlet.

- Products with a welded plastic housing or rated IP 67 are not repairable. For such products the supply cord cannot be replaced. If the cord is damaged the appliance should be scrapped. Please contact your supplier for replacement part.
- This product contains hazardous voltages and there are no user replaceable parts inside the product. Never attempt to remove the cover.
- **WARNING:** No modification of this equipment is allowed. Any repair/service should be carried out by qualified personnel who may get assistance by contacting the manufacturer or the manufacturer's agent.
- Products specified to have automatic polarity protection must be switched off if a battery is connected with reverse polarity. The protection will be automatically reset when the polarity has been corrected.
- In chargers specified to have a replaceable fuse as polarity protection the fuse must be replaced if the battery has been connected with reverse polarity. When replacing the fuse; a fuse of the same type and rating must be used.
- If the product is specified to comply with the standard for Medical Electrical Equipment (standards based on IEC60601-1) it complies with some of the requirements for medical electrical equipment and may be used in medical applications and hospital environments.
- The product must be kept away from sources of heat and may not be used in the vicinity of flammable anesthetic gases or in other environments with flammable or explosive atmosphere.
- If the product is specified to comply with the standard for Medical Electrical Equipment for Home Healthcare Environment (standard IEC60601-1-11) it may be used in medical applications used in a home healthcare environment.

NOTE: Products relying on safety earth for protection (Class I) may not be used in home healthcare environment unless they are permanently wired to the building installation: Installation must only be carried out by qualified

service personnel, following the below instructions:

- The protective earth conductor must be min. 0.75 mm².
- Connect the protective earth conductor to the external protective earthing system.
- Verify that the protective earth terminal used is connected to the external protective earthing system.
- Verify the integrity of the external protective earthing system.
- This product converts the mains voltage to a safety extra low voltage.
The output from products applying with 2MOPP insulation (model names followed by "P") may be treated as Applied Part Type B or Type BF according to standard EN/IEC 60601-1 and may come in physical contact with a patient. The housing of the product shall not be allowed to contact the patient .
- This product must be operated in an environment within temperature range +5 to +40°C, humidity 15 - 93 % RH and atmospheric pressure 70 - 106 kPa (700 - 1060 hPa). If the product has recently been stored or transported at conditions outside this range; please wait for 30 minutes before operating the product.
- Expected service life of this product and accessories delivered with this product is three (3) years, if operated as indicated above. However; the guarantee times indicated in the terms of sales and delivery for ACCU-24 apply, available at www.accu-24.de / www.airbatt.de.
- Environmental parameters during transport and storage between uses: temperature range -25 to +85 °C, humidity 15 - 93% RH NC and atmospheric pressure 70 - 106 kPa (700 - 1060 hPa).
- If stored for longer periods of time the environmental parameters should be within the temperature range +5 to +35°C, humidity range 10 - 75% RH NC and atmospheric pressure 70 - 106 kPa (700 - 1060 hPa) to maintain the products expected service life.

- Expected shelf life of this product is one (1) year, if stored as indicated above.
- This product complies with the requirements to electromagnetic compatibility for medical electric equipment and for use in residential, office or light industrial environment but all electric products imply a potential for electromagnetic or other interference between the product and other devices. If such interference is suspected please disconnect the product from the mains and consult a qualified technician, your supplier or the manufacturer.
- No special maintenance procedure is required but if the product gets dusty or dirty it should be wiped clean using a dry cloth while the product is disconnected from the mains. No other maintenance should be necessary.
- For products having a plastic casing, please avoid any contact with lotions, oils, grease and solvents as most types of plastic may be degraded by such chemicals. Also make sure to position, operate and store such products away from UV-light and direct sunlight.
- Position, operate and store this product only under reasonable foreseeable environmental conditions with respect to magnetic fields, EM-fields, electrostatic discharges, pressure or variations in pressure, acceleration etc.
- If this product is used with or mounted in a vehicle it may only be used when the vehicle is not in use.
- When in use, position this product so that the label can be read – within 40 cm of the operator.
- Turn the product off and allow it's housing to cool down prior to moving it to another location.

Cautions to observe prior to charging Li-Ion-batteries


- Li-Ion chargers are designed for charging Li-Ion (LI) batteries only. Make sure you have the correct battery charger for the chemistry and number of cells in series. If the number of cells in series in the battery pack is not known you can calculate it by dividing the voltage indicated by 3.6VDC for LI (e.g. a 14.4VDC LI battery contains 4 Li-Ion cells). Make sure the charge voltage indicated on the charger corresponds to the number of battery cells in series multiplied by 4.2VDC (e.g. a 4 cell LI battery is typically charged using 16.8VDC).

NOTE: The voltages indicated above are typical and may vary between battery types and battery makes. If in doubt; consult the specifications for your battery.
- Make sure the specifications for your battery allows for the maximum charge current indicated on the charger.
- Make sure the specifications for your battery allows for the environmental conditions present during charging.
- Never attempt to charge batteries that are not rechargeable.
- We recommend that you connect the charger to the mains before connection is made to the battery. This will reduce the sparks that may occur due to difference in potential between charger terminals and battery terminals. Note! Make sure the charger terminals are not short-circuited and ensure that the polarity is correct.
- Please ensure correct polarity when connecting to the battery terminals. Reverse polarity connection may, in some chargers (see the chargers specifications), result in a fuse blowing, requiring replacement or leaving the charger useless.
- The charge cycle starts when the charger is connected to the mains.
- If the charger is disconnected from the mains voltage during a charge cycle the charger will start a new charge cycle when it is reconnected to the mains.
- The recommended minimum and maximum battery capacity for which the specific charger can be used vary from battery to battery. Please follow the datasheet and recommendations from the battery manufacturer. In our tables we use

typical 1C as a maximum current for Li-Ion cells. 1C means that charge current for a 1Ah battery should be max 1A. Thus the typical minimum capacity recommendation is 1Ah for a 1A charger. For max battery capacity we have used C/40 for chargers with timer (and/or uC) and 100 times current detection levels for chargers using only

this termination method. For a 1A charger with 0.1A current detection level the max capacity recommended will be $100 \times 0.1A = 10Ah$. Again this is just typical recommendations. Please read recommendations and datasheets from battery manufacturer.

How to connect exchangeable AC-plugs

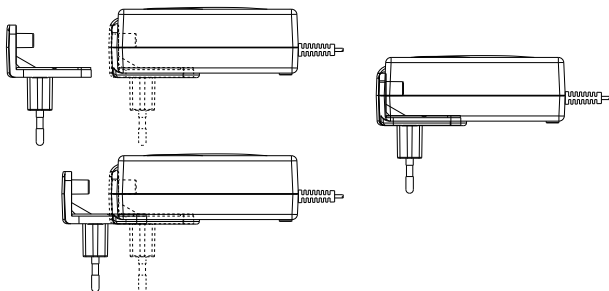


The following exchangeable AC plugs are available:

"EURO"	250V 2.5A (EN50075/IEC83 C5 II)
"US"	125V 2.5A (NEMA 1-15 / CSA-C22.2 No.42)
"UK"	250V 13A (BS 1363)
"AUS"	250V 10A (AS/NZS 3112)

Mains Cord Set is available on request if you wish your product to be "DeskTop"

How to connect exchangeable DC-output plugs



1. To connect for desired polarity, both plug ends are clearly marked.
2. When connected, the female plug is also marked on each side to identify plug polarity.
3. Shows the center polarity of the plug.

Explanation of Li-Ion battery charge cycle

(See tables for methods for each charger model.)

Charging method A

STEP 1 – CONSTANT CURRENT CHARGE

To start a charge cycle; connect the charger to the mains.

The charger is in constant current mode, charging with the maximum current indicated on the charger, the LED-indication on the charger is ORANGE. This step allows rapid charging of your battery until the battery reaches typically 80 - 95% of its capacity.



STEP 2 – CONSTANT VOLTAGE CHARGE

The charger is in constant voltage mode, charging with a decreasing current until the current is below the chargers charge termination level (indicated on the charger). The LED-indication on the charger is ORANGE. The battery is charged to its full capacity at the end of this step




STEP 3 –CHARGE COMPLETE

The LED-indication on the charger is GREEN and the battery is fully charged.

For Li-Ion batteries the charge current is zero and the battery has been charged to its full capacity.



After end of charge battery voltage will remain at "Step 2" level even if output voltage of charger is indicated as lower in the diagram. The charger will return to Step 1 if the battery is used. A load larger than the cut-off current will initiate a new charge cycle.

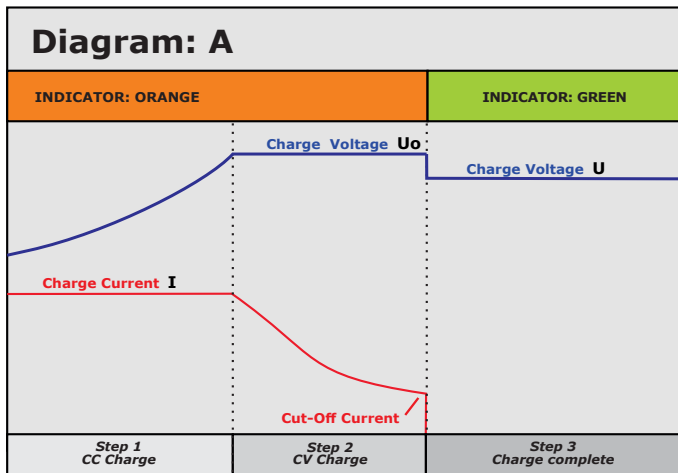

Charging method B

STEP 1 - CONSTANT CURRENT CHARGE

To start a charge cycle; connect the charger to the mains.


The charger is in constant current mode, charging with the maximum current indicated on the charger, the LED-indication on the charger is ORANGE. This step allows rapid charging of your battery until the battery voltage has increased to a certain set level



STEP 2 - CONSTANT VOLTAGE CHARGE

When the battery voltage has increased to a certain set level the charger enters constant voltage mode, charging with a decreasing current until the current is below the chargers charge termination level (indicated on the charger). The LED-indication on the charger is ORANGE. When the battery has reached typically 90 - 95% of its full capacity the charge current has dropped below a set level and the LED-indication on the charger changes to YELLOW to indicate that the battery is almost fully charged and may be ready for use.


The constant voltage charge continues and the battery reaches its full capacity at the end of this step



STEP 3 - CHARGE COMPLETE

The LED-indication on the charger is GREEN and the battery is fully charged.

For Li-Ion batteries the charge current is zero and the battery has been charged to its full capacity. After end of charge battery voltage will remain at "Step 2" level even if output voltage of charger is indicated as lower in the diagram. The charger will return to Step 1 if the battery is used. A load larger than the cut-off current will initiate a new charge cycle.

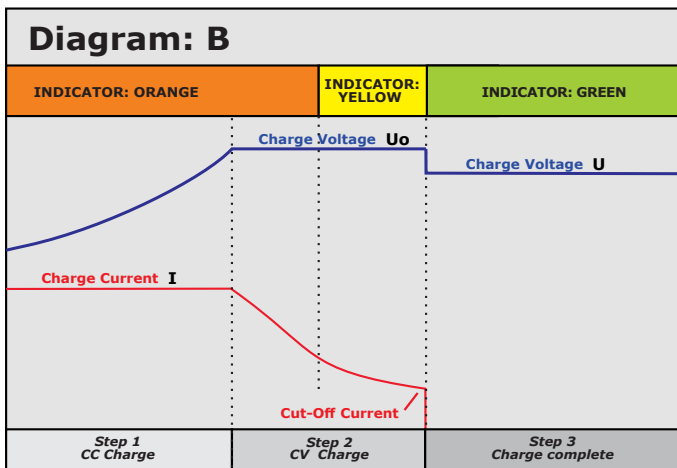

Charging method C

STEP 1 – CONSTANT CURRENT CHARGE

To start a charge cycle; connect the charger to the mains.

The charger is in constant current mode, charging with the maximum current indicated on the charger, the LED-indication on the charger is ORANGE (or RED 9640). This step allows rapid charging of your battery until the battery reaches typically 80 - 95% of its capacity.



STEP 2 – CONSTANT VOLTAGE (TIMER) CHARGE

The charger is in constant voltage mode, charging with a decreasing current. The LED-indication on the charger is YELLOW. The charger is now in timer mode indicated by the YELLOW LED and will remain in this mode until time interval is completed. The battery is charged to its full capacity at the end of this step.




STEP 3 - CHARGE COMPLETE

The LED-indication on the charger is GREEN and the battery is fully charged.

For Li-Ion batteries the charge current is zero and the battery has been charged to its full capacity.

The charge voltage is at standby level which means that the charger can continue to be connected to the battery. After end of charge battery voltage will remain at "Step 2" level even if output voltage of charger is indicated as lower in the diagram.

The charger will return to Step 1 if the battery is used. A load larger than the constant current level in Step 1 will initiate a new charge cycle.

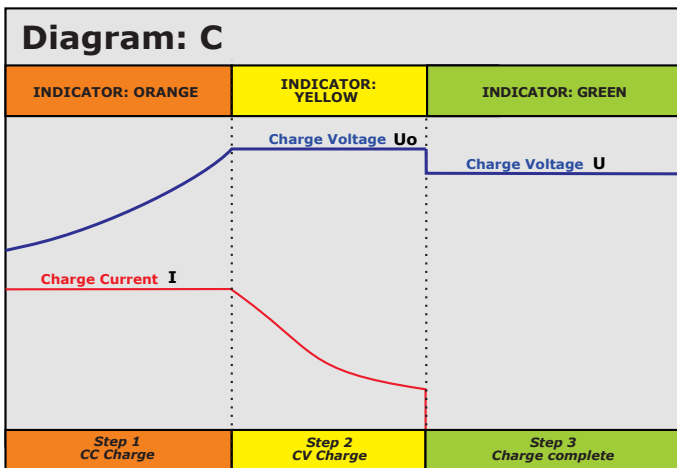

Charging method D

STEP 1 - CONSTANT CURRENT CHARGE

Charge cycle starts automatically when input is connected to mains and battery is connected to the output. The charger is in constant current mode (CC), charging with the maximum current indicated on the charger. The LED-indication on the charger is YELLOW. This step allows rapid charging of your battery until the battery reaches typically 80-95% of its capacity.

Note: If battery is less than 3V/cell, charger will apply low current start up. If nominal voltage is not reached during start timer period, charge will terminate and 4 red blinks error will be indicated.



STEP 2 - CONSTANT VOLTAGE (TIMER) CHARGE

The charger is in constant voltage mode (CV). Charge current is decreasing. The LED-indication on the charger is changed to FLASHING YELLOW shortly after entering this mode. The charger will remain in this mode until the current has decreased to end of charge detection level or until CV timer runs out. The battery is charged to its full capacity at the end of this step.



STEP 3 - CHARGE COMPLETE

The LED-indication on the charger is GREEN and the battery is fully charged. The charge current is zero and the battery has been charged to its full capacity. Charger may remain connected to the battery. A new charge cycle will be initiated if battery voltage decreases with 0.1V/cell.



BATTERY NOT CONNECTED INDICATIONS

Battery not connected is indicated by FLASHING GREEN. In this mode charger will apply short pulses attempting to wake up deeply discharged batteries.




ERROR INDICATIONS

- 2 red blinks: Battery is connected to charger with wrong polarity!
- 3 red blinks: Charger output is shorted. Check output cable connection!
- 4 red blinks: Battery voltage is low. Check battery status or voltage.
- 5 red blinks: Safety timer has run out. Check battery status or capacity.
- LED off: Battery voltage is too high. Check battery voltage.

WAIT MODE INDICATIONS

- Yellow with 1 red blink: Battery temperature is too low ($<0^{\circ}\text{C}$)
- Yellow with 2 red blinks: Battery temperature is too high ($>45^{\circ}\text{C}$)

Diagram: D

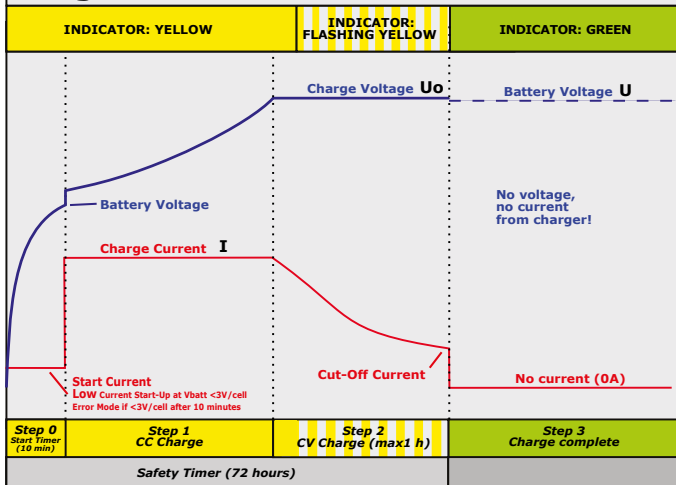

Electromagnetic Compatibility

In order to regulate the requirements for EMC (electromagnetic compatibility) with the aim of preventing unsafe product situations, the EMC EN60601-1-2 standard has been implemented. This standard defines the levels of immunity to electromagnetic interference as well as maximum levels of electromagnetic emissions for medical devices. Medical devices manufactured by ACCU-24 have been tested and conform with the requirements of

IEC/EN 60601-1-2, 3rd & 4th edition, nevertheless, special precautions may need to be observed:

The ACCU-24 products are suitable for use in Domestic, Residential, Office and Hospital environment, except in special locations where EM Disturbances are known to be high, such as near High Frequency Surgical Equipment or Magnetic Resonance Imaging systems.

When used according to its specification the User can expect the product to fulfil its essential performance, being powering Medical Electrical Devices or charging batteries for Medical Electrical Devices.

WARNING: Use of this equipment adjacent to or stacked with other equipment should be avoided because it may result in improper operation. If such use is necessary, this equipment and the other equipment should be observed to verify that they are operating normally.

WARNING: Use of accessories, transducers and cables other than provided by the manufacturer could result in increased electromagnetic emissions or decreased electromagnetic immunity of this equipment and result in improper operation.

WARNING: Portable RF communications equipment should be used no closer than 30 cm (12 inches) to any part of the power supply or battery charger, including cables. Otherwise, degradation of the performance of this equipment could result.

Guidance and manufacturer's declaration

The Masot products are intended for use in the electromagnetic environment specified below. The customer or user should ensure that it is used in such an environment.

Test / Standard	Compliance level	Guidance
Emission:		
RF emissions, CISPR 11	Group 1, Class B	Suitable for use in all establishments, including domestic establishments and those directly connected to the public low-voltage power supply network that supplies buildings used for domestic purposes. RF emissions not likely to cause any interference in nearby electronic equipment. However, a separation distance of 30 cm shall be maintained.
Harmonic emissions, IEC 61000-3-2	-	
Voltage fluctuations / flicker emissions, IEC 61000-3-3	-	

Test / Standard	Compliance level	Guidance
Immunity:		
Electrostatic discharge (ESD), IEC 61000-4-2	± 8 kV contact ± 15 kV air	Temporary loss of function may be experienced while the product is subject to the phenomena. The product is expected to recover to it's normal operation.
Electrostatic fast transient / burst, IEC 61000-4-4	± 2 kV for AC-power lines ± 1 kV for output lines	
Surge, IEC 61000-4-5	± 1 kV line to line ± 2 kV line to earth (if applicable).	
Voltage dips, short interruptions and voltage variations on power supply lines, IEC 61000-4-11	<5% U_T (0.5 cycle) 40% U_T (5 cycles) 70% U_T (25 cycles) <5% U_T for 5 s U_T = AC Input Voltage prior to test.	
Power frequency magnetic field IEC 61000-4-8	3 A/m (50/60 Hz)	Not applicable for non-magnetic field sensitive devices.
Conducted RF, IEC 61000-4-6	3 Vrms 150 kHz to 80 MHz	Temporary loss of function may be experienced while the product is subject to the phenomena. The product is expected to recover to it's normal operation.
Radiated RF, IEC 61000-4-3	3V/m for Professional healthcare environment. 10 V/m for Home Health-care environment. 80 MHz to 2.7 GHz	

These guidelines may not apply in all situations.

Electromagnetic propagation is affected by absorption and reflection from structures, objects and people and field strengths from fixed transmitters, such as base stations for radio (cellular/ cordless) telephones and land mobile radios, amateur radio, AM and FM radio broadcasts and TV broadcasts cannot be predicted theoretically with accuracy.

To assess the electromagnetic environment due to fixed RF transmitters an EM site survey may be considered. If the measured field strength in the location exceeds the applicable RF compliance level above, the ACCU-24 product should be observed to verify normal operation. If abnormal performance is observed, additional measures may be necessary, such as re-orienting or relocating the product.

Technical data (If not appearing in table see marking on the product)

Charge diagram A

	Input voltage	Charge LED indicator	1 cell (3.6V)	2 cell (7.2V)	3 cell (10.8V)	4 cell (14.4V)	5 cell (18V)
2240(P) 2241(P)	100-240Vac 50-60Hz max 0.35A	Orange CC ch.: Orange CV ch.: Green ch. complete: Rec. batt. capacity:	1.3A < 4.2V 4.2V > 100mA < 100mA 1.3Ah – 10Ah	1.3A < 8.4V 8.4V > 100mA < 100mA 1.3Ah – 10Ah	1.2A < 12.6V 12.6V > 100mA < 100mA 1.2Ah – 10Ah	0.9A < 16.8V 16.8V > 100mA < 100mA 0.9Ah – 10Ah	0.7A < 21V 21V > 100mA < 100mA 0.7Ah – 10Ah
2740	100-240Vac 50-60Hz	Orange CC ch.: Orange CV ch.: Green ch. complete: Rec. batt. capacity:	1.0A < 4.2V 4.2V > 100mA < 100mA 1Ah – 10Ah	1.0A < 8.4V 8.4V > 100mA < 100mA 1Ah – 10Ah	0.7A < 12.6V 12.6V > 100mA < 100mA 0.7Ah – 10Ah	0.6A < 16.8V 16.8V > 100mA < 100mA 0.6Ah – 10Ah	0.5A < 21V 21V > 100mA < 100mA 0.7Ah – 10Ah

	Input voltage	Charge LED indicator	6 cell (21.6V)	7 cell (25.2V)	8 cell (28.8V)	9 cell (32.4V)	10 cell (36V)
2240(P) 2241(P)	100-240Vac 50-60Hz max 0.35A	Orange CC ch.: Orange CV ch.: Green ch. complete: Rec. batt. capacity:	0.6A < 25.2V 25.2V > 100mA < 100mA 0.6Ah – 10Ah	0.56A < 29.4V 29.4V > 100mA < 100mA 0.56Ah – 10Ah	0.49A < 33.6V 33.6V > 100mA < 100mA 0.49Ah – 10Ah	0.43A < 37.8V 37.8V > 100mA < 100mA 0.43Ah – 10Ah	0.39A < 42V 42V > 100mA < 100mA 0.39Ah – 10Ah
2740	100-240Vac 50-60Hz	Orange CC ch.: Orange CV ch.: Green ch. complete: Rec. batt. capacity:	0.4A < 25.2V 25.2V > 100mA < 100mA 0.4Ah – 10Ah	0.35A < 29.4V 29.4V > 100mA < 100mA 0.35Ah – 10Ah	0.3A < 33.6V 33.6V > 100mA < 100mA 0.3Ah – 10Ah	0.27A < 37.8V 37.8V > 100mA < 100mA 0.27Ah – 10Ah	0.25A < 42V 42V > 100mA < 100mA 0.25Ah – 10Ah

Technical data (If not appearing in table see marking on the product)

Charge diagram A

	Input voltage	Charge LED indicator	11 cell (39.6V)	12 cell (43.2V)	13 cell (46.8V)	14 cell (50.4V)	16 cell (57.6V)
2240(P) 2241(P)	100-240Vac 50-60Hz max 0.35A	Orange CC ch.: Orange CV ch.: Green ch. complete: Rec. batt. capacity:	0.35A < 46.2V 46.2V > 100mA < 100mA 0.35Ah – 10Ah	0.32A < 50.4V 50.4V > 100mA < 100mA 0.32Ah – 10Ah	0.30A < 54.6V 54.6V > 100mA < 100mA 0.3Ah – 10Ah	0.27A < 58.8V 58.8V > 100mA < 100mA 0.27Ah – 10Ah	0.22A < 67.2V 67.2V > 100mA < 100mA 0.2Ah – 10Ah
2740	100-240Vac 50-60Hz	Orange CC ch.: Orange CV ch.: Green ch. complete: Rec. batt. capacity:	0.22A < 46.2V 46.2V > 100mA < 100mA 0.2Ah – 10Ah	0.2A < 50.4V 50.4V > 100mA < 100mA 0.2Ah – 10Ah	0.18A < 54.6V 54.6V > 100mA < 100mA 0.2Ah – 10Ah	0.17A < 58.8V 58.8V > 100mA < 100mA 0.15Ah – 10Ah	0.15A < 67.2V 67.2V > 100mA < 100mA 0.15Ah – 10Ah

Charge diagram B

	Input voltage	Charge LED indicator	1 cell (3.6V)	2 cell (7.2V)	3 cell (10.8V)	4 cell (14.4V)	5 cell (18V)
2541(P) 2542(P)	100-240Vac 50-60Hz max 0.9A (20-60V/dc) max 2A	Orange CC ch.: Orange CV ch.: Yellow CV ch.: Green ch. complete: Rec. batt. capacity:	2.7A < 4.2V 4.2V > 1.15A 4.2V < 1.15A < 100mA 2.7Ah – 10Ah	2.7A < 8.4V 8.4V > 1A 8.4V < 1A < 100mA 2.7Ah – 10Ah	2.3A < 12.6V 12.6V > 1.0A 12.6V < 1.0A < 100mA 2.3Ah – 10Ah	2.0A < 16.8V 16.8V > 0.85A 16.8V < 0.85A < 100mA 2Ah – 10Ah	1.6A < 21V 21V > 0.7A 21V < 0.7A < 100mA 1.6Ah – 10Ah
2544	10-30V/dc	Orange CC ch.: Orange CV ch.: Yellow CV ch.: Green ch. complete: Rec. batt. capacity:	3.0A < 4.2V 4.2V > 1.15A 4.2V < 1.15A < 100mA 3Ah – 10Ah	2.7A < 8.4V 8.4V > 1.15A 8.4V < 1.15A < 100mA 2.7Ah – 10Ah	2.3A < 12.6V 12.6V > 0.9A 12.6V < 0.9A < 100mA 2.3Ah – 10Ah	2.0A < 16.8V 16.8V > 0.85A 16.8V < 0.85A < 100mA 2Ah – 10Ah	1.6A < 21V 21V > 0.7A 21V < 0.7A < 100mA 1.6Ah – 10Ah

Technical data (If not appearing in table see marking on the product)

Charge diagram B

	Input voltage	Charge LED indicator	1 cell (3.6V)	2 cell (7.2V)	3 cell (10.8V)	4 cell (14.4V)	5 cell (18V)
3044	10-30Vdc	Orange CC ch.:	4.0A < 4.2V	4.0A < 8.4V	4.0A < 12.6V	3.5A < 16.8V	2.8A < 21V
		Orange CV ch.:	4.2V > 2A	8.4V > 2A	12.6V > 2A	12.6V > 1.7A	21V > 1.5A
2641 per channel	100-240Vac 50-60Hz	Yellow CV ch.:	4.2V < 2A	8.4V < 2A	12.6V < 2A	12.6V < 1.7A	21V < 1.5A
		Green ch. complete: Rec. batt. capacity:	< 250mA 4Ah – 25Ah	< 250mA 4Ah – 25Ah	< 250mA 4Ah – 25Ah	< 250mA 3.5Ah – 25Ah	< 250mA 2.8Ah – 25Ah
2440(P) 2441(P) 2442(P)	100-240Vac 50-60Hz max. 1.6A	Orange CC ch.:	2.7A < 4.2V	2.7A < 8.4V	2.3A < 12.6V	1.8A < 16.8V	1.4A < 21V
		Orange CV ch.:	4.2V > 1.15A	8.4V > 1.15A	12.6V > 0.9A	16.8V > 0.85A	21V > 0.6A
284X(P)	220-240Vac 50-60Hz max. 1.2A	Yellow CV ch.:	4.2V < 1.15A	8.4V < 1.15A	12.6V < 0.9A	16.8V < 0.85A	21V < 0.6A
		Green ch. complete: Rec. batt. capacity:	< 100mA 2.7Ah – 10Ah	< 100mA 2.7Ah – 10Ah	< 100mA 2.3Ah – 10Ah	< 100mA 1.8Ah – 10Ah	< 100mA 1.4Ah – 10Ah
324X(P)	110-120Vac/ 220-240Vac 50-60Hz max. 2.1A	Orange CC ch.:	4.5A < 4.2V	4.5A < 8.4V	4.5A < 12.6V	3.5A < 16.8V	3.3A < 21V
		Orange CV ch.:	4.2V > 1.8A	8.4V > 1.8A	12.6V > 1.8A	16.8V > 1.6A	21V > 1.6A
3240B 3240BP	220-240Vac 50-60Hz max. 2.1A	Yellow CV ch.:	4.2V < 1.8A	8.4V < 1.8A	12.6V < 1.8A	16.8V < 1.6A	21V < 1.6A
		Green ch. complete: Rec. batt. capacity:	< 300mA 4Ah – 30Ah	< 300mA 4Ah – 30Ah	< 300mA 4Ah – 30Ah	< 300mA 3.5Ah – 30Ah	< 300mA 3.3Ah – 30Ah
3340	220-240Vac	Orange CC ch.:	8.5A < 4.2V	8.5A < 8.4V	7.9A < 12.6V	6A < 16.8V	4.7A < 21V
		Orange CV ch.:	4.2V > 3.8A	8.4V > 3.5A	12.6V > 3.1A	16.8V > 2.7A	21V > 1.9A
3240B 3240BP	220-240Vac 50-60Hz max. 2.1A	Yellow CV ch.:	4.2V < 3.8A	8.4V < 3.5A	12.6V < 3.1A	16.8V < 2.7A	21V < 1.9A
		Green ch. complete: Rec. batt. capacity:	< 300mA 8.5Ah – 30Ah	< 300mA 8Ah – 30Ah	< 300mA 7Ah – 30Ah	< 300mA 6Ah – 30Ah	< 300mA 4.5Ah – 30Ah
3340	220-240Vac	Orange CC ch.:	N.A.	N.A.	N.A.	N.A.	N.A.
		Orange CV ch.:	N.A.	N.A.	N.A.	N.A.	N.A.

Technical data (If not appearing in table see marking on the product)

Charge diagram B

	Input voltage	Charge LED indicator	6 cell (21.6V)	7 cell (25.2V)	8 cell (28.8V)	9 cell (32.4V)	10 cell (36V)
2541(P) 2542(P)	100-240Vac 50-60Hz max 0.9A (20-60Vdc) max 2A	Orange CC ch.:	1.4A <25.2V	1.2A <29.4V	1.0A <33.6V	0.9A <37.8V	0.8A <42V
		Orange CV ch.:	25.2V >0.6A	29.4V >0.5A	33.6V >0.4A	37.8V >0.35A	42V >0.35A
2544	10-30Vdc	Yellow CV ch.:	25.2V <0.6A	29.4V <0.5A	33.6V <0.4A	37.8V <0.35A	42V <0.35A
		Green ch. complete:	<100mA	<100mA	<100mA	<100mA	<100mA
3044	10-30Vdc	Rec. batt. capacity:	1.4Ah – 10Ah	1.2Ah – 10Ah	1Ah – 10Ah	0.9Ah – 10Ah	0.8Ah – 10Ah
		Orange CC ch.:	1.4A <25.2V	1.2A <29.4V	1.0A <33.6V	0.9A <37.8V	0.8A <42V
2641 per channel	100-240Vac 50-60Hz	Orange CV ch.:	25.2V >1.1A	29.4V >1A	33.6V >0.8A	37.8V >0.8A	42V >0.7A
		Yellow CV ch.:	25.2V <1.1A	29.4V <1A	33.6V <0.8A	37.8V <0.8A	42V <0.7A
2440(P) 2441(P) 2442(P)	100-240Vac 50-60Hz max. 1.6A	Green ch. complete:	<250mA	<250mA	<250mA	<250mA	<100mA
		Rec. batt. capacity:	2.3Ah – 25Ah	2Ah – 25Ah	1.7Ah – 25Ah	1.6Ah – 25Ah	1.5Ah – 10Ah
2440(P) 2441(P) 2442(P)	100-240Vac 50-60Hz max. 1.6A	Orange CC ch.:	1.2A <25.2V	1.0A <29.4V	0.9A <33.6V	0.8A <37.8V	0.7A <42V
		Orange CV ch.:	25.2V >0.6A	29.4V >0.5A	33.6V >0.4A	37.8V >0.35A	42V >0.3A
2440(P) 2441(P) 2442(P)	100-240Vac 50-60Hz max. 1.6A	Yellow CV ch.:	25.2V <0.6A	29.4V <0.5A	33.6V <0.4A	37.8V <0.35A	42V <0.3A
		Green ch. complete:	<100mA	<100mA	<100mA	<100mA	<100mA
2440(P) 2441(P) 2442(P)	100-240Vac 50-60Hz max. 1.6A	Rec. batt. capacity:	1.4Ah – 10Ah	1.0Ah – 10Ah	0.9Ah – 10Ah	0.8Ah – 10Ah	0.7Ah – 10Ah
		Orange CC ch.:	2.8A <25.2V	2.5A <29.4V	2.1A <33.6V	1.9A <37.8V	1.8A <42V
2440(P) 2441(P) 2442(P)	100-240Vac 50-60Hz max. 1.6A	Orange CV ch.:	25.2V >1.6A	29.4V >0.8A	33.6V >0.8A	37.8V >0.8A	42V >0.8A
		Yellow CV ch.:	25.2V <1.6A	29.4V <0.8A	33.6V <0.8A	37.8V <0.8A	42V <0.8A
2440(P) 2441(P) 2442(P)	100-240Vac 50-60Hz max. 1.6A	Green ch. complete:	<300mA	<300mA	<300mA	<200mA	<200mA
		Rec. batt. capacity:	2.8Ah – 30Ah	2.5Ah – 30Ah	2.1Ah – 30Ah	1.9Ah – 20Ah	1.8Ah – 20Ah

Technical data (If not appearing in table see marking on the product)

Charge diagram B

	Input voltage	Charge LED indicator	6 cell (21.6V)	7 cell (25.2V)	8 cell (28.8V)	9 cell (32.4V)	10 cell (36V)
284X(P)	220-240Vac 50-60Hz max. 1.2A	Orange CC ch.: Orange CV ch.: Yellow CV ch.: Green ch. complete: Rec. batt. capacity:	3.9A < 25.2V 25.2V > 1.7A 25.2V < 1.7A < 300mA 3.9Ah – 30Ah	3.5A < 29.4V 29.4V > 1.6A 29.4V < 1.6A < 300mA 3.5Ah – 30Ah	3A < 33.6V 33.6V > 1.4A 33.6V < 1.4A < 300mA 3Ah – 30Ah	2.7A < 37.8V 37.8V > 1.3A 37.8V < 1.3A < 300mA 2.7Ah – 30Ah	2.4A < 42V 42V > 1.2A 42V < 1.2A < 300mA 2.4Ah – 30Ah
	110-120Vac/ 220-240Vac 50-60Hz max. 2.1A	Orange CC ch.: Orange CV ch.: Yellow CV ch.: Green ch. complete: Rec. batt. capacity:	25A < 25.2V 25.2V > 10A 25.2V < 10A < 3A 25Ah – 300Ah	22A < 29.4V 29.4V > 7A 29.4V < 7A < 3A 22Ah – 300Ah	19A < 33.6V 33.6V > 7A 33.6V < 7A < 3A 19Ah – 300Ah	17A < 37.8V 37.8V > 7A 37.8V < 7A < 3A 17Ah – 300Ah	15A < 42V 42V > 7A 42V < 7A < 3A 15Ah – 300Ah
3340	220-240Vac	Orange CC ch.: Orange CV ch.: Yellow CV ch.: Green ch. complete: Rec. batt. capacity:	25A < 25.2V 25.2V > 10A 25.2V < 10A < 3A 25Ah – 300Ah	22A < 29.4V 29.4V > 7A 29.4V < 7A < 3A 22Ah – 300Ah	19A < 33.6V 33.6V > 7A 33.6V < 7A < 3A 19Ah – 300Ah	17A < 37.8V 37.8V > 7A 37.8V < 7A < 3A 17Ah – 300Ah	15A < 42V 42V > 7A 42V < 7A < 3A 15Ah – 300Ah

	Input voltage	Charge LED indicator	11 cell (39.6V)	12 cell (43.2V)	13 cell (46.8V)	14 cell (50.4V)	15 cell (54V)	16 cell (57.6V)
2541(P) 2542(P)	100-240Vac 50-60Hz max 0.9A	Orange CC ch.: Orange CV ch.: Yellow CV ch.: Green ch. complete: Rec. batt. capacity:	0.7A < 46.2V 46.2V > 0.3A 46.2V < 0.3A < 100mA 0.7Ah – 10Ah	0.7A < 50.4V 50.4V > 0.3A 50.4V < 0.3A < 100mA 0.7Ah – 10Ah	0.6A < 54.6V 54.6V > 0.25A 54.6V < 0.25A < 100mA 0.6Ah – 10Ah	0.6A < 58.8V 58.8V > 0.25A 58.8V < 0.25A < 100mA 0.6Ah – 10Ah	N.A.	0.5A < 67.2V 67.2V > 0.2A 67.2V < 0.2A < 100mA 0.5Ah – 10Ah
	(20-60Vdc) max 2A	Orange CC ch.: Orange CV ch.: Yellow CV ch.: Green ch. complete: Rec. batt. capacity:	0.7A < 46.2V 46.2V > 0.3A 46.2V < 0.3A < 100mA 0.7Ah – 10Ah	0.7A < 50.4V 50.4V > 0.3A 50.4V < 0.3A < 100mA 0.7Ah – 10Ah	0.6A < 54.6V 54.6V > 0.25A 54.6V < 0.25A < 100mA 0.6Ah – 10Ah	0.6A < 58.8V 58.8V > 0.25A 58.8V < 0.25A < 100mA 0.6Ah – 10Ah	N.A.	0.5A < 67.2V 67.2V > 0.2A 67.2V < 0.2A < 100mA 0.5Ah – 10Ah
2544	10-30Vdc	Orange CC ch.: Orange CV ch.: Yellow CV ch.: Green ch. complete: Rec. batt. capacity:	0.7A < 46.2V 46.2V > 0.3A 46.2V < 0.3A < 100mA 0.7Ah – 10Ah	0.7A < 50.4V 50.4V > 0.3A 50.4V < 0.3A < 100mA 0.7Ah – 10Ah	0.6A < 54.6V 54.6V > 0.25A 54.6V < 0.25A < 100mA 0.6Ah – 10Ah	0.6A < 58.8V 58.8V > 0.25A 58.8V < 0.25A < 100mA 0.6Ah – 10Ah	N.A.	0.5A < 67.2V 67.2V > 0.2A 67.2V < 0.2A < 100mA 0.5Ah – 10Ah

Technical data (If not appearing in table see marking on the product)

Charge diagram B

	Input voltage	Charge LED indicator	11 cell (39.6V)	12 cell (43.2V)	13 cell (46.8V)	14 cell (50.4V)	15 cell (54V)	16 cell (57.6V)
3044	10-30Vdc	Orange CC ch.:	1.3A < 46.2V	1.2A < 50.4V	1.1A < 54.6V	1A < 58.8V		0.8A < 67.2V
		Orange CV ch.:	46.2V > 0.6A	50.4V > 0.5A	54.6V > 0.45A	58.8V > 0.4A		67.2V > 0.35A
		Yellow CV ch.:	46.2V < 0.6A	50.4V < 0.5A	54.6V < 0.45A	58.8V < 0.4A	N.A.	67.2V < 0.35A
		Green ch. complete: Rec. batt. capacity:	< 100mA 1.3Ah – 10Ah	< 100mA 1.2Ah – 10Ah	< 100mA 1.1Ah – 10Ah	< 100mA 1Ah – 10Ah		< 100mA 0.8Ah – 10Ah
2641 per channel	100-240Vac 50-60Hz	Orange CC ch.:	0.6A < 46.2V	0.6A < 50.4V	0.5A < 54.6V	0.5A < 58.8V		0.45A < 67.2V
		Orange CV ch.:	46.2V > 0.25A	50.4V > 0.25A	54.6V > 0.25A	58.8V > 0.25A		67.2V > 0.2A
		Yellow CV ch.:	46.2V < 0.25A	50.4V < 0.25A	54.6V < 0.25A	58.8V < 0.25A	N.A.	67.2V < 0.2A
		Green ch. complete: Rec. batt. capacity:	< 100mA 0.6Ah – 10Ah	< 100mA 0.6Ah – 10Ah	< 100mA 0.5Ah – 10Ah	< 100mA 0.5Ah – 10Ah		< 100mA 0.45Ah – 10Ah
2440(P) 2441(P) 2442(P)	100-240Vac 50-60Hz max. 1.6A	Orange CC ch.:	1.6A < 46.2V	1.45A < 50.4V	1.35A < 54.6V	1.3A < 58.8V	1.15A < 63.0V	1A < 67.2V
		Orange CV ch.:	46.2V > 0.8A	50.4V > 0.6A	54.6V > 0.6A	58.8V > 0.6A	63.0V > 0.6A	67.2V > 0.6A
		Yellow CV ch.:	46.2V < 0.8A	50.4V < 0.6A	54.6V < 0.6A	58.8V < 0.6A	63.0V < 0.6A	67.2V < 0.6A
		Green ch. complete: Rec. batt. capacity:	< 200mA 1.6Ah – 20Ah	< 200mA 1.45Ah – 20Ah	< 100mA 1.35Ah – 10Ah	< 100mA 1.3Ah – 10Ah	< 100mA 1.15Ah – 10Ah	< 100mA 1Ah – 10Ah
284X(P)	220-240Vac 50-60Hz max. 1.2A	Orange CC ch.:	2.2A < 46.2V	2A < 50.4V	1.8A < 54.6V	1.7A < 58.8V	1.6A < 63.0V	1.5A < 67.2V
		Orange CV ch.:	46.2V > 0.9A	50.4V > 0.9A	54.6V > 0.8A	58.8V > 0.7A	63.0V > 0.6A	67.2V > 0.6A
		Yellow CV ch.:	46.2V < 0.9A	50.4V < 0.9A	54.6V < 0.8A	58.8V < 0.7A	63.0V < 0.6A	67.2V < 0.6A
		Green ch. complete: Rec. batt. capacity:	< 300mA 2.2Ah – 30Ah	< 300mA 2.2Ah – 30Ah	< 300mA 1.8Ah – 30Ah	< 300mA 1.7Ah – 30Ah	< 300mA 1.6Ah – 30Ah	< 200mA 1.5Ah – 20Ah
324X(P) 3240B 32408P	110-120Vac/ 220-240Vac 50-60Hz max. 2.1A	Orange CC ch.:	14A < 46.2V	13A < 50.4V	12A < 54.6V	11A < 58.8V		10A < 67.2V
		Orange CV ch.:	46.2V > 5A	50.4V < 5A	54.6V < 5A	58.8V > 4A		67.2V > 4A
		Yellow CV ch.:	46.2V < 5A	50.4V < 5A	54.6V < 5A	58.8V < 4A	N.A.	67.2V < 4A
		Green ch. complete: Rec. batt. capacity:	< 2A 14Ah – 200Ah	< 2A 13Ah – 200Ah	< 2A 12Ah – 200Ah	< 2A 11Ah – 200Ah		< 2A 10Ah – 200Ah
3340	220-240Vac	Orange CC ch.:	14A < 46.2V	13A < 50.4V	12A < 54.6V	11A < 58.8V		10A < 67.2V
		Orange CV ch.:	46.2V > 5A	50.4V < 5A	54.6V < 5A	58.8V > 4A		67.2V > 4A
		Yellow CV ch.:	46.2V < 5A	50.4V < 5A	54.6V < 5A	58.8V < 4A	N.A.	67.2V < 4A
		Green ch. complete: Rec. batt. capacity:	< 2A 14Ah – 200Ah	< 2A 13Ah – 200Ah	< 2A 12Ah – 200Ah	< 2A 11Ah – 200Ah		< 2A 10Ah – 200Ah

Technical data (If not appearing in table see marking on the product)

Charge diagram C

	Input voltage	Charge LED indicator	1 cell (3.6V)	2 cell (7.2V)	3 cell (10.8V)	4 cell (14.4V)	5 cell (18V)
9640 9641	220-240Vac 50-60Hz	Red/Orange CC ch.: Yellow Timer CV ch.: Green ch. complete: Rec. batt. capacity:	N.A.	2.7A < 8.4V 8.4V < 2.7A (4h) complete 2.7Ah – 108Ah	2.7A < 12.6V 12.6V < 2.7A (4h) complete 2.7Ah – 108Ah	2.4A < 16.8V 16.8V < 2.4A (4h) complete 2.4Ah – 96Ah	1.5A < 21V 21V < 1.5A (4h) complete 1.5Ah – 60Ah
9940 9941	100-240Vac 50-60Hz	Orange CC ch.: Yellow Timer CV ch.: Green ch. complete: Rec. batt. capacity:	N.A.	N.A.	2.3A < 12.6V 12.6V < 2.3A (4h) complete 2.3Ah – 92Ah	2A < 16.8V 16.8V < 2A (4h) complete 2Ah – 80Ah	1.3A < 21V 21V < 1.3A (4h) complete 1.3Ah – 52Ah
2040(P) 2041(P) 2042(P) 2140(P)	100-240Vac 50-60Hz max.1.2A	Orange CC ch.: Yellow Timer CV ch.: Green ch. complete: Rec. batt. capacity:	N.A.	N.A.	4A < 12.6V 12.6V < 4A (4h) complete 4Ah – 400Ah	3.5A < 16.8V 16.8V < 3.5A (4h) complete 3.5Ah – 140Ah	2A < 21V 21V < 2A (4h) complete 2Ah – 80Ah
	Input voltage	Charge LED indicator	6 cell (21.6V)	7 cell (25.2V)	8 cell (28.8V)	9 cell (32.4V)	10 cell (36V)
9640 9641	220-240Vac 50-60Hz	Red/Orange CC ch.: Yellow Timer CV ch.: Green ch. complete: Rec. batt. capacity:	1.5A < 25.2V 25.2V < 1.5A (4h) complete 1.5Ah – 60Ah	1.5A < 29.4V 29.4V < 1.5A (4h) complete 1.5Ah – 60Ah	1.3A < 33.6V 33.6V < 1.3A (4h) complete 1.3Ah – 52Ah	1.1A < 37.8V 37.8V < 1.1A (4h) complete 1.1Ah – 44Ah	1A < 42V 42V < 1A (4h) complete 1Ah – 40Ah
9940 9941	100-240Vac 50-60Hz	Orange CC ch.: Yellow Timer CV ch.: Green ch. complete: Rec. batt. capacity:	1.3A < 25.2V 25.2V < 1.3A (4h) complete 1.3Ah – 52Ah	1.3A < 29.4V 29.4V < 1.3A (4h) complete 1.3Ah – 52Ah	1A < 33.6V 33.6V < 1A (4h) complete 1Ah – 40Ah	0.9A < 37.8V 37.8V < 0.9A (4h) complete 0.9Ah – 36Ah	0.9A < 42V 42V < 0.9A (4h) complete 0.9Ah – 36Ah
2040(P) 2041(P) 2042(P) 2140(P)	100-240Vac 50-60Hz max.1.2A	Orange CC ch.: Yellow Timer CV ch.: Green ch. complete: Rec. batt. capacity:	2A < 25.2V 25.2V < 2A (4h) complete 2Ah – 80Ah	2A < 29.4V 29.4V < 2A (4h) complete 2Ah – 80Ah	1.7A < 33.6V 33.6V < 1.7A (4h) complete 1.7Ah – 68Ah	1.5A < 37.8V 37.8V < 1.5A (4h) complete 1.5Ah – 60Ah	1.4A < 42V 42V < 1.4A (4h) complete 1.4Ah – 56Ah

Technical data (If not appearing in table see marking on the product)

Charge diagram C

	Input voltage	Charge LED indicator	11 cell (39.6V)	12 cell (43.2V)	13 cell (46.8V)	14 cell (50.4V)	16 cell (57.6V)
9640 9641	220-240Vac 50-60Hz	Red/Orange CC ch.: Yellow Timer CV ch.: Green ch. complete: Rec. batt. capacity:	N.A.	N.A.	N.A.	N.A.	N.A.
9940 9941	100-240Vac 50-60Hz	Orange CC ch.: Yellow Timer CV ch.: Green ch. complete: Rec. batt. capacity:	N.A.	N.A.	N.A.	N.A.	N.A.
2040(P) 2041(P) 2042(P) 2140(P)	100-240Vac 50-60Hz max.1.2A	Orange CC ch.: Yellow Timer CV ch.: Green ch. complete: Rec. batt. capacity:	1.3A < 46.2V 46.2V < 1.3A (4h) complete 1.3Ah – 52Ah	1.2A < 50.4V 50.4V < 2A (4h) complete 1.2Ah – 48Ah	1.1A < 54.6V 54.6V < 1.1A (4h) complete 1.1Ah – 44Ah	1A < 58.8V 58.8V < 1A (4h) complete 1Ah – 40Ah	N.A.

X = 0,1,2

(P) = 2MOPP version

(B) = Special open frame PCB

(All standard versions are also available as open frame units)

Technical data (If not appearing in table see marking on the product)

Charge diagram D

	Input voltage	Charge LED indicator	1-cell	2-cell	3-cell	4-cell	5-cell	6-cell	7-cell
3540 ★	220-240Vac 50Hz max.2.4A	Yellow CC ch.:	N.A.	N.A.	20A < 12.6V	17.5A < 16.8V	N.A.	10A < 25.2V	10A < 29.4V
		Yellow CV ch.:			12.6V > 14A	16.8V > 12A		25.2V > 8.0A	29.4V > 8.0A
		Yellow flash CV ch.:			12.6V < 14A	16.8V < 12A		25.2V < 8.0A	29.4V < 8.0A
		Green ch. compl.:			< 0.8A	< 0.8A		< 0.8A	< 0.8A
3540 ★	115Vac 50-60Hz max.3.7A	Rec. batt. capacity:	N.A.	N.A.	20 – 800Ah	17.5 – 700Ah	N.A.	10 – 400Ah	10 – 400Ah
		Yellow CC ch.:			20A < 12.6V	15.0A < 16.8V		10A < 25.2V	8.5A < 29.4V
		Yellow CV ch.:			12.6V > 14A	16.8V > 10A		25.2V > 8.0A	29.4V > 6.5A
		Yellow flash CV ch.:			12.6V < 14A	16.8V < 10A		25.2V < 8.0A	29.4V < 6.5A
3546	100-240Vac 50-60Hz max.0.7A	Green ch. compl.:	N.A.	N.A.	< 0.8A	< 0.8A	N.A.	< 0.8A	< 0.8A
		Rec. batt. capacity:			20 – 800Ah	15 – 600Ah		10 – 400Ah	8.5 – 340Ah
		Yellow CC ch.:			2.2A < 12.6V	1.6A < 16.8V		1.15A < 25.2V	1.0A < 29.4V
		Yellow CV ch.:			12.6V > 1.9A	16.8V > 1.3A		21V > 0.9A	29.4V > 0.8A
3743	100-240Vac 50-60Hz max.0.5A	Yellow flash CV ch.:	N.A.	N.A.	12.6V < 1.9A	16.8V < 1.3A	N.A.	21V < 0.9A	29.4V < 0.8A
		Green ch. compl.:			< 100mA	< 100mA		< 100mA	< 100mA
		Rec. batt. capacity:			2.2Ah – 88Ah	1.6Ah – 64Ah		1.15Ah – 46Ah	1Ah – 40Ah
		Yellow CC ch.:			1.2A < 12.6V	1A < 16.8V		0.66A < 25.2V	0.56A < 29.4V
3743	100-240Vac 50-60Hz max.0.5A	Yellow CV ch.:	N.A.	N.A.	12.6V > 1A	16.8V > 0.8A	N.A.	21V > 0.55A	29.4V > 0.49A
		Yellow flash CV ch.:			12.6V < 1A	16.8V < 0.8A		21V < 0.55A	29.4V < 0.49A
		Green ch. compl.:			< 100mA	< 100mA		< 100mA	< 100mA
		Rec. batt. capacity:			1.2Ah – 48Ah	1Ah – 40Ah		0.66Ah – 26.4Ah	0.56Ah – 22.4Ah
3546	100-240Vac 50-60Hz max.0.7A	Charge LED indicator	8-cell	9-cell	10-cell	11-cell	12-cell	13-cell	14-cell
		Yellow CC ch.:	0.85A < 33.6V	0.75A < 37.8V	0.7A < 42V	0.6A < 46.2V	0.55A < 50.4V	0.5A < 54.6V	0.5A < 58.8V
		Yellow CV ch.:	33.6V > 0.7A	37.8V > 0.65A	42V > 0.6A	46.2V > 0.5A	50.4V > 0.45A	54.6V > 0.4A	58.8V > 0.4A
		Yellow flash CV ch.:	33.6V < 0.7A	37.8V < 0.65A	42V < 0.6A	46.2V < 0.5A	50.4V < 0.45A	54.6V < 0.4A	58.8V < 0.4A
3743	100-240Vac 50-60Hz max.0.5A	Green ch. compl.:	< 100mA	< 100mA	< 100mA	< 100mA	< 100mA	< 100mA	< 100mA
		Rec. batt. capacity:	0.85Ah – 34Ah	0.75Ah – 30Ah	0.7Ah – 28Ah	0.6Ah – 24Ah	0.55Ah – 22Ah	0.5Ah – 20Ah	0.5Ah – 20Ah
		Yellow CC ch.:	0.5A < 33.6V	0.45A < 37.8V	0.4A < 42V	0.37A < 46.2V	0.33A < 50.4V	0.3A < 54.6V	0.3A < 58.8V
		Yellow CV ch.:	33.6V > 0.4A	37.8V > 0.35A	42V > 0.3A	46.2V > 0.3A	50.4V > 0.26A	54.6V > 0.25A	58.8V > 0.25A
3743	100-240Vac 50-60Hz max.0.5A	Yellow flash CV ch.:	33.6V < 0.4A	37.8V < 0.35A	42V < 0.3A	46.2V < 0.3A	50.4V < 0.26A	54.6V < 0.25A	58.8V < 0.25A
		Green ch. compl.:	< 100mA	< 100mA	< 80mA	< 80mA	< 80mA	< 56mA	< 56mA
		Rec. batt. capacity:	0.5Ah – 20Ah	0.45Ah – 18Ah	0.4Ah – 16Ah	0.37Ah – 14.8Ah	0.33Ah – 13.2Ah	0.3Ah – 12Ah	0.3Ah – 12Ah

Technical data (If not appearing in table see marking on the product)

Charge diagram D

	Input voltage	Charge LED indicator	1 cell			
			EasyPack S	EasyPack L	EasyPack XL	EasyPack PLUS
3745	100-240Vac 50-60Hz max.0.25A	Yellow CC ch.: Yellow CV ch.: Yellow flash CV ch.: Green ch. complete: Batt. capacity:	0.45A < 4.2V 4.2V > 0.36A 4.2V < 0.36A < 25mA 0.66Ah	0.85A < 4.2V 4.2V > 0.67A 4.2V < 0.67A < 55mA 1.2Ah	1.5A < 4.2V 4.2V > 1.2A 4.2V < 1.2A < 125mA 2.4Ah	1.5A < 4.2V 4.2V > 1.2A 4.2V < 1.2A < 260mA 5.2Ah

The max. battery capacities given in the tables above are for guidance only.
For import to the U.S.A.: see the U.S. DOE Compliance Certification Database for maximum battery capacity allowed.

* Output automatically derated when operated at high amb. temperature.

05.12.2020



ACCU-24 Batterien & Systeme GmbH

Untergasse 5
63688 Gedern
Germany

E-Mail: info@accu-24.de
Tel.: +49 (0)6045 9525-20

www.accu-24.de

www.airbatt.de