
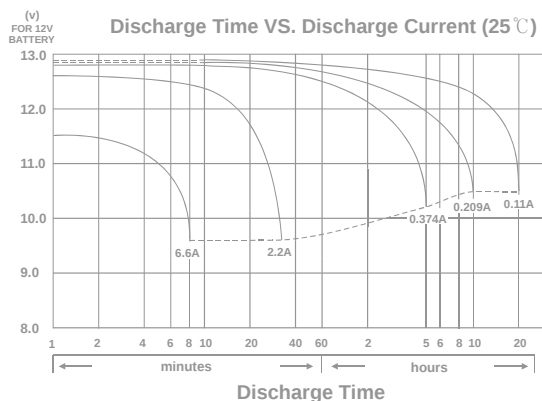
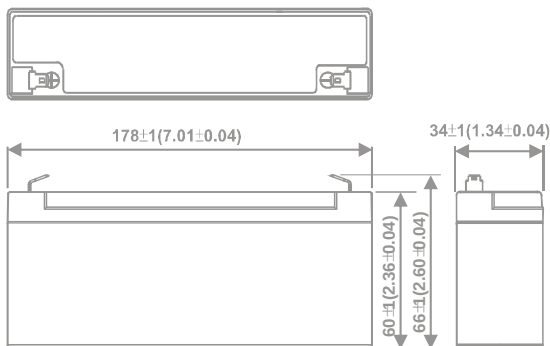


SPECIFICATION



Nominal Voltage(V) 12V

Nominal Capacity

20 hour rate	(0.11A	to	10.50V)	2.2Ah
10 hour rate	(0.209A	to	10.50V)	2.09Ah
5 hour rate	(0.374A	to	10.20V)	1.87Ah
1 C	(2.2A	to	9.60V)	1.25Ah
3 C	(6.6A	to	9.60V)	0.88Ah

Weight Approx. 1.1kg(2.42Lbs.)

Internal Resistance (at 1KHz) Approx. 37 mΩ

Maximum Discharge Current for

5 seconds: 33A

Charging Methods at 25°C(77°F)

Cycle use:	
Charging Voltage	14.7 to 14.8V
Coefficient -5.0mV/°C/cell	
Maximum Charging Current:	0.66A
Standby use:	
Float Charging Voltage	13.50 to 13.80V
Coefficient -3.0mV/°C/cell	

Operating Temperature Range

Charge	-15°C(5°F) to 40°C(104°F)
Discharge	-15°C(5°F) to 50°C(122°F)
Storage	-15°C(5°F) to 40°C(104°F)

Charge Retention (shelf life) at 20°C(68°F)

1 month	92%
3 month	90%
6 month	80%

Case Material

(UL94 HB flame retardant case / cover)

ABS

Terminal

F1(Faston Tab 187)