



The AIRBATT Powerchager DUO 2641 PB includes two separate chagers in on housing for lead batteries (wet / VRLA) or our AIRBATT LiFePO4 batteries.

Input

Input Voltage	100-240Vac
Line frequency	50-60Hz

Output

Max. Charge voltage	14,8V
Max. charge current	2.0A
Standby voltage	13,80V
Max output power	60W
Ripple	<100mV p-p
Efficiency (at 100% load, 230V) approx.	82%
Switch frequency approx.	40kHz
Leakage current	<1mA


Specifications

IP-Grade	IP41
Protected against reversed polarity & short circuit proof	
Safety	EN60601-1
Operating Temperature	-25 to +40°C

Always refer to the latest edition of the Technical Manual for a safe usage. This and more useful downloads, such as product catalogs, material safety data sheet (MSDS), etc. can be found on our website www.airbatt.de

Dimension


Length	135mm
Width	90mm
Height	44mm
Weight	390g

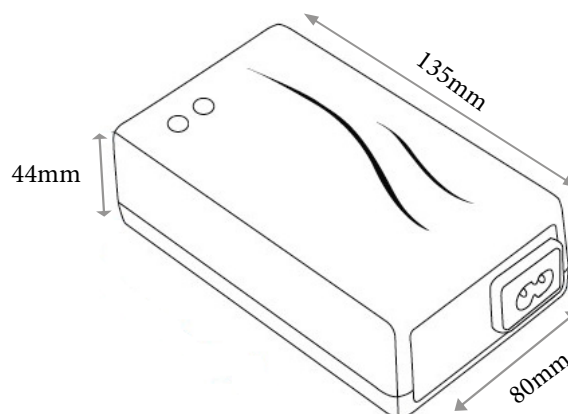

Output I & II

	Orange	2.0A 14.8V
	Yellow	14.8V <0.75A
	Green Ready/Standby	13.80V

Diagram: B

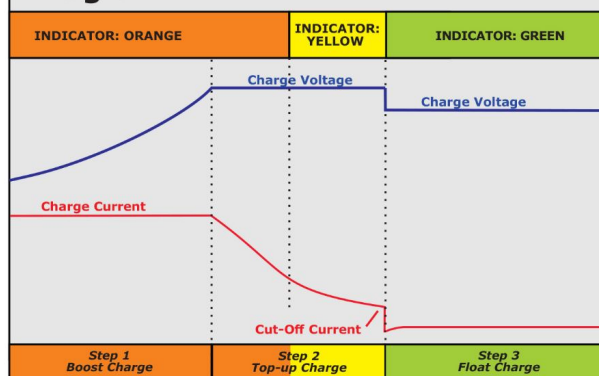

© 2021 ACCU-24 Batterien & Systeme GmbH
All rights reserved. All trademarks are the property of their respective owners.
All data subject to change without notice.