




Dimension

Length	135mm
Width	80mm
Height	44mm
Weight	350g

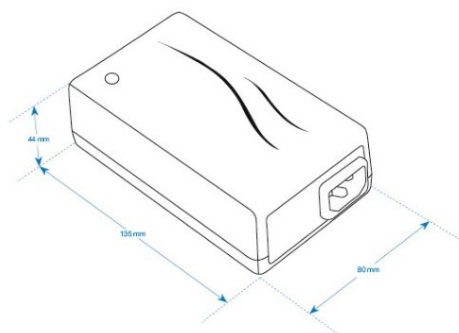

Input

Input Voltage	100-240VAC
Line frequency	50-60Hz

Output

Max. Charge voltage	29,5V
Max. charge current	2.0A
Standby voltage	27,60V
Ripple	<100mV p-p
Efficiency (at 100% load, 13,5V)	80%
Switch frequency approx.	40kHz
Leakage current	<1mA

Input 100-240VAC
max. 1.2A

Output



Orange

2.0A



Yellow

29,5VDC



Green
Ready/Standby

27,6VDC

Specifications

IP-Grade	IP41
Protected against reversed polarity & short circuit proof	
Safety	EN60601-1
Operating Temperature	-25 to +40°C

Lead Acid charger diagram C

