



Dimension

Length	192mm
Width	109mm
Height	53,5mm
Weight	980g

Input


Input Voltage	220-240Vac
Line frequency	50-60Hz

Output

Max. Charge voltage	14,6V
Max. charge current	10A
Standby voltage	14,0V
Ripple	<100mV p-p
Efficiency (at 100% load, 13,5V)	83%
Switch frequency approx.	63kHz
Leakage current	<1mA

Specifications

IP-Grade	IP41
Protected against reversed polarity & short circuit proof	
Safety	EN60601-1
Operating Temperature	-25 to +40°C

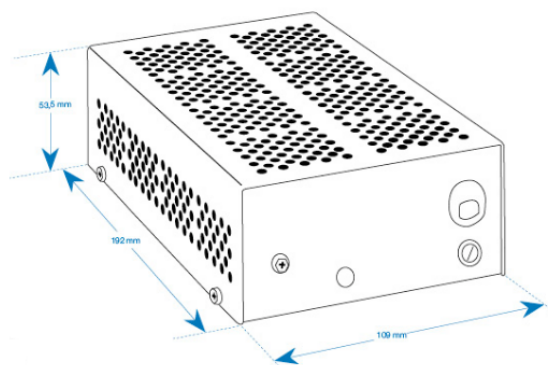

	Red	10A
	Yellow	14,6V
	Green Ready/Standby	14V

Lead Acid charger diagram C

