



SPECIFICATION

Nominal Voltage (V)	12V
Nominal Capacity (C20)	20.00Ah
Dimension (L x B/W x H)	181 x 76 x 167 mm
Weight Approx.	5.95kg (13.09lbs)

Cold cranking amps: 320A(EN)

Charging Methods at 25°C(77°F)

Cycle use:	
Charging Voltage	14.70V to 15.00V
Coefficient	-5.0mV/°C/cell
Standby use:	
Float Charging Voltage	13.60V to 13.80V
Coefficient	-3.0mV/°C/cell

Operating Temperature Range



Charge	-15°C (5°F) to 40°C (104°F)
Discharge	-15°C (5°F) to 50°C (122°F)
Storage	-15°C (5°F) to 40°C (104°F)

Charge Retention (shelf life) at 20°C (68°F)

1 month	92%
3 month	90%
6 month	80%

Case Material ABS
(UL94 HB flame retardant case / cover)

Terminal F3

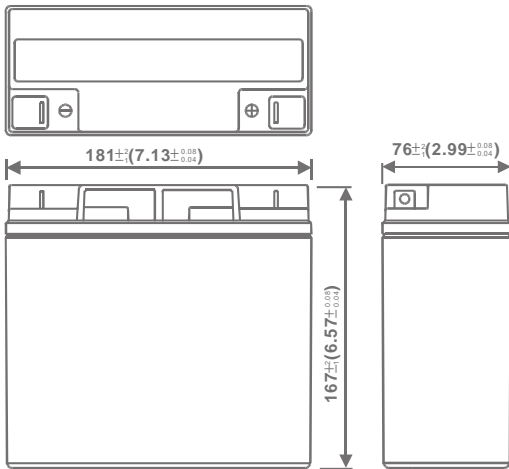

(V) FOR 12V BATTERY Discharge Time VS. Discharge Current (25°C)

