



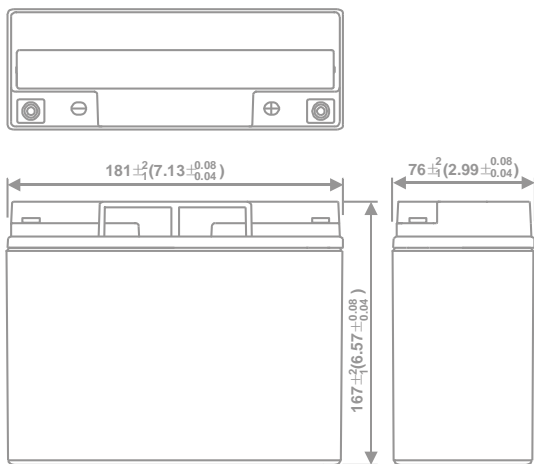

**SPECIFICATION**

<b>Nominal Voltage (V)</b>	12V
<b>Nominal Capacity (C20)</b>	22,00Ah
<b>Weight Approx.</b>	6.7kg (14.74lbs)
<b>Cold cranking amps:</b>	420A(EN)



**Charging Methods at 20°C**

Cycle use:	
Charging Voltage	14.70V to 15.00V
Coefficient	-5.0mv/°C/cell
Standby use:	
Float Charging Voltage	13.60V to 13.80V
Coefficient	-3.0mv/°C/cell

**Operating Temperature Range**

Charge	-15°C (5°F) to 40°C (104°F)
Discharge	-15°C (5°F) to 50°C (122°F)
Storage	-15°C (5°F) to 40°C (104°F)

**Charge Retention (shelf life) at 20°C (68°F)**

1 month	92%
3 month	90%
6 month	80%

**Case Material** ABS  
(UL94 HB flame retardant case / cover)

**Terminal** F8

**Description of torque value of hard ware for the terminals:**

Recommended torque value	M6: 5.39 N-m (55kg-cm)
Maximum allowable torque value	M6: 8.82 N-m (90kg-cm)

