
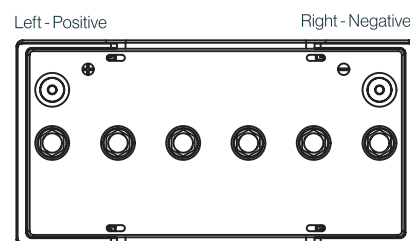


EQ-5SHP

Carbon Nano Gel Bloc

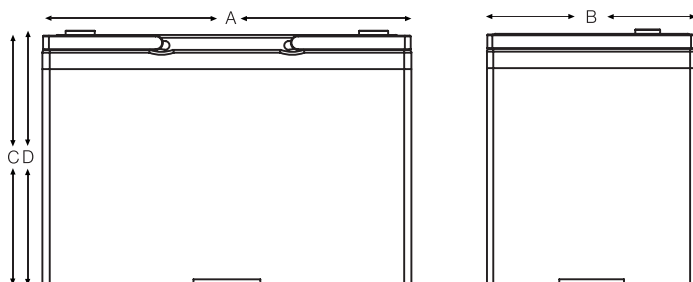

Electrical Specifications

Voltage	12V
M.R.C. 25 Amps	230
80% DOD Voltage Cutoff	11.2V
Low Voltage Cutoff	10.8V
Self Discharge	Less than 3% per month (20°C/68°F)
Charge Temperature	Min: -10°C (14°F) / Max: 50°C (122°F)
Discharge Temperature**	Min: -40°C (-40°F) / Max: 50°C (122°F)
Storage	Min: -20°C (-4°F) / Max: 60°C (140°F)

Amp Hours (AH)			
5 HR	10 HR	20 HR	100 HR
108	116	123	130

** CAUTION: Depths of discharge, operating voltages and currents, when designing systems for use at maximum temperatures, will vary.

Mechanical Specifications

Industry Reference	BCI 12 / 5SHP	
Length (A)	13 in	329 mm
Width (B)	6.7 in	170 mm
Height (C)	10.2 in	258 mm
Weight	93 lbs	42 kgs
Terminal (Opt'l)*	M8	
Cell(s)	6	
Electrolyte	Gel	
Terminal Torque Nm	8	

NOTE: There is a tolerance of +/-2%.

Terminal Options Available:

M8
A-Pole
Dual
Stud

ET/DATAQUASAR GEL EQ 5SHP V1 0722

Features

Maintenance free - no topping up required

Ultra energy efficient due to low resistance

Reduced operating temperatures for increased cycle life (>1500 cycles) and battery lifetime

Cost savings due to increased efficiency

Up to 2 x faster recharge

Increased design life from 12 to 15 years

Allows for opportunity charging to give you those extra running times when required

Suitable for extreme temperature variants

Applications: all motive, leisure & solar:

Electric vehicles, including cleaning machines

Wheelchairs

Electric Working Platforms

UPS Systems

Traffic Systems

Telecommunications & Emergency Lighting

Caravans / Motorhomes RV's & Maritime

Solar & Renewable Energy & Home Invertor


Compliant with EN60254-1&2 and IEC254-1/2

Charging profile


IU Charging $I = \text{min. } 12\% C_5 \text{ max. } 30\% C_5$
 $U = 2.4 \text{ V per cell}$

IUI Charging $I_1 = \text{min. } 12\% C_5 \text{ max. } 40\% C_5$
 $U = 2.35 \text{ V per cell}$
 $I_2 = 1.5\% C_5 \text{ for max. 4 hours}$


Self discharge at different temperatures

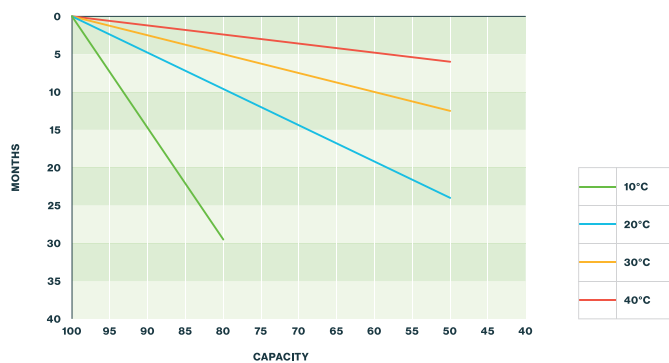

Capacity vs. temperature

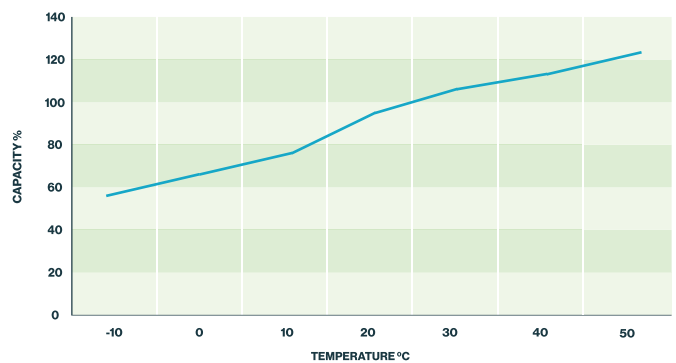


Storage: Determine the state of charge

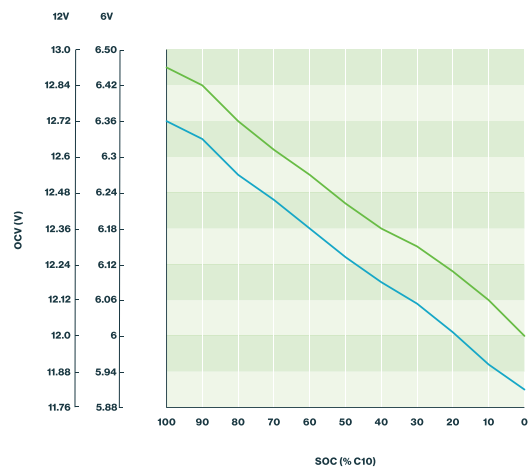

—	OCV max
—	OCV min

Relation between charging, voltage and temperature

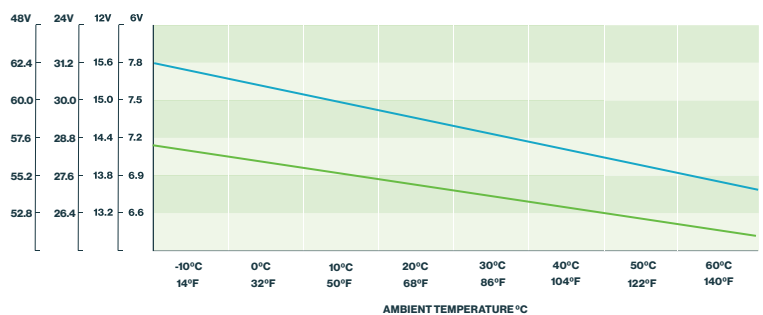

—	STANDBY USE
—	CYCLE USE