

Sprinter P-XP / XP12V3400

INDUSTRIAL BATTERIES / NETWORK POWER

The extremely powerful, compact AGM batteries of the Sprinter P and Sprinter XP series are an ideal energy source for uninterrupted power supply and are particularly good in UPS applications and other security systems. GNB's experience and innovation with VRLA technology makes Sprinter batteries the preferred choice for high rate emergency battery backup.

Part Number: **NAXP123400HP0FA**



APPLICATIONS



SPECIFICATIONS

- Maintenance-free (no topping up) during the whole service life
- High-Compression Absorbent Glass Mat (AGM) technology
- Design life: »10-12 Years – Long Life« according to EUROBAT 2015 classification
- Available as standard or flame retardant version (UL 94-V0)
- Designed in accordance with IEC 60896-21/-22
- Grid plates with superior lead calcium alloy for excellent corrosion resistance
- Very low gassing due to internal gas recombination (99% efficiency)
- No restrictions for rail, road, sea and air transportation (IATA, DGR clause A67) – trouble-free transportation of operational blocks
- Approval: UL (Underwriter Laboratories)
- Manufactured in Europe in our ISO 9001 certified production plants



Design life
10-12 years
– Long Life



Block battery



Grid plate



Recyclable



Valve
regulated
lead-acid
batteries



Maintenance
free (no
topping up)



Special high
current
performance

RECYCLE WITH EXIDE.



Exide Technologies takes pride in its commitment to a better environment. An integrated approach to manufacturing, distributing and recycling of leadacid batteries has been developed to ensure a safe and responsible life cycle for all of its products.



For more information please
[contact your local dealer](#)

EXIDE Distributionscenter Frankfurt a.M.

ACCU-24 Batterien & Systeme GmbH

Untergasse 5
63688 Gedern
Tel.: +49 (0) 06045 952520
Fax: +49 (0) 06045 952966

www.ACCU-24.de

info@accu-24.de



P6V1700 / Seite 1 von 2



TECHNICAL CHARACTERISTICS AND DATA

| | |
|------------------------------|-------------------------------------------------------------|
| Nominal voltage | 12 V |
| Float charge | 2,27 V/C @ 25 °C |
| Capacity | CP 10min 1,6V/C 25°C 3400W/Bloc CC 10h 1,8V/C 25°C 105Ah |
| Short circuit current | 2767 A (IEC60896-21/22) |
| Internal resistance | 4,5 mΩ (IEC60896-21/22) |

| | |
|---------------------------------|--------------------------|
| Terminal | F - M6 |
| Terminal Torque | 11 Nm |
| Container | UL 94-HB (Polypropylene) |
| Temperature range | -40°C to 55°C |
| Dimensions (l x b/w x h) | 351 x 172 x 239 mm |
| Weight | 35,5 kg |
| Origin | Castanheira, Portugal |


CONSTANT POWER DISCHARGE

| W @ 25 °C | 1 min | 2 min | 3 min | 5 min | 10 min | 15 min | 20 min | 30 min | 45 min | 1 h | 2 h | 3 h | 5 h | 8 h | 10 h |
|-----------|-------|-------|-------|-------|--------|--------|--------|--------|--------|-----|-----|-----|-----|-----|------|
| 1,900 V/C | 2600 | 2600 | 2600 | 2600 | 2100 | 1756 | 1505 | 1180 | 895 | 726 | 458 | 329 | 208 | 135 | 109 |
| 1,850 V/C | 3046 | 3046 | 3046 | 3046 | 2472 | 2075 | 1783 | 1400 | 1054 | 853 | 490 | 349 | 220 | 143 | 116 |
| 1,800 V/C | 4450 | 4200 | 3990 | 3500 | 2720 | 2250 | 1928 | 1500 | 1126 | 905 | 505 | 358 | 225 | 146 | 118 |
| 1,750 V/C | 5350 | 4900 | 4494 | 3897 | 2976 | 2435 | 2052 | 1568 | 1163 | 932 | 525 | 368 | 232 | 149 | 120 |
| 1,700 V/C | 6160 | 5580 | 5050 | 4276 | 3146 | 2515 | 2100 | 1590 | 1180 | 945 | 530 | 371 | 234 | 151 | 122 |
| 1,650 V/C | 6580 | 5950 | 5397 | 4584 | 3300 | 2595 | 2150 | 1620 | 1202 | 960 | 535 | 376 | 237 | 153 | 124 |
| 1,600 V/C | 7000 | 6300 | 5740 | 4850 | 3400 | 2640 | 2185 | 1645 | 1220 | 970 | 540 | 380 | 240 | 155 | 126 |


CONSTANT CURRENT DISCHARGE

| A @ 25 °C | 1 min | 2 min | 3 min | 5 min | 10 min | 15 min | 20 min | 30 min | 45 min | 1 h | 2 h | 3 h | 5 h | 8 h | 10 h | 20 h |
|-----------|-------|-------|-------|-------|--------|--------|--------|--------|--------|------|------|------|------|------|------|------|
| 1,900 V/C | 200 | 200 | 200 | 200 | 195 | 140 | 122 | 97 | 76 | 62 | 37,6 | 26,7 | 16,5 | 10,7 | 8,7 | 4,5 |
| 1,850 V/C | 270 | 270 | 270 | 270 | 213 | 176 | 150 | 115 | 85 | 68 | 40,6 | 28,9 | 18,3 | 11,8 | 9,6 | 5 |
| 1,800 V/C | 379 | 357 | 340 | 315 | 240 | 195 | 164 | 125 | 93 | 74 | 43 | 30,3 | 19,5 | 12,8 | 10,5 | 5,5 |
| 1,750 V/C | 465 | 426 | 410 | 357 | 271 | 218 | 181 | 135 | 98 | 77 | 44,2 | 30,9 | 20 | 13 | 10,7 | 5,6 |
| 1,700 V/C | 536 | 485 | 470 | 400 | 293 | 229 | 188 | 139 | 100 | 78,5 | 44,8 | 31,5 | 20,2 | 13,2 | 10,8 | 5,7 |
| 1,650 V/C | 598 | 541 | 540 | 440 | 306 | 237 | 193 | 142 | 102 | 80 | 45,3 | 32 | 20,4 | 13,4 | 10,9 | 5,8 |
| 1,600 V/C | 636 | 620 | 610 | 490 | 323 | 245 | 196 | 145 | 105 | 82 | 45,8 | 32,3 | 20,6 | 13,5 | 11 | 5,9 |

Technical drawing



Float Voltage vs Temperature

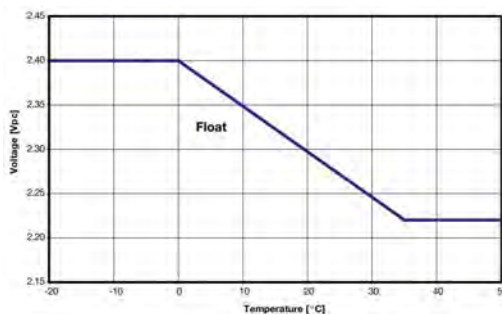

EXIDE Distributionscenter Frankfurt a.M.

ACCU-24 Batterien & Systeme GmbH

Untergasse 5
63688 Gedern
Tel.: +49 (0) 06045 952520
Fax: +49 (0) 06045 952966

www.ACCU-24.de

info@accu-24.de



P6V1700 / Seite 1 von 2

